

Uf 831

ULTRASONIC FIXED FLOW METER



MEDIA
MEASURED
LIQUIDS



PIPE DIAMETERS
UP TO
10000MM



MODELS
SINGLE PIPE
MULTI-PIPE

HIGH PERFORMANCE

- > Up to eight speed chords on a single pipe
- > Up to 10 input/output modules (analogue, digital)
- > Graphic screen
- > Echo, gain and quality index displayed

ACCURATE

- > Accurate up to 0.5%
- > Repeatability up to 0.1%
- > Automatic zero calibration

ADVANCED FUNCTIONS


- > Mathematical functions generator
- > Multi-parameter data logger
- > Field bus option: Modbus TCP/Modbus RTU

COMPETITIVE

- > Up to eight measurement points with a single device
- > Rapid installation
- > No moving parts, no mechanical wear: little or no maintenance required

ADAPTABLE

- > Connection of all Ultraflux probes or probes already installed*

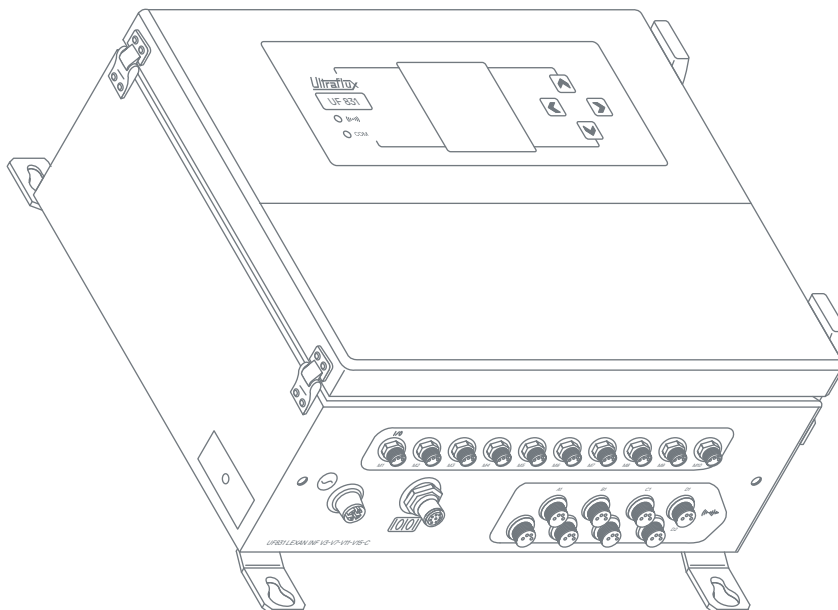

TYPICAL APPLICATIONS

Waste water and drinking water: Flow measurement and metering, process control, system supervision

Waste water: Measurement of inlet and outlet flows, and flows within the treatment process

Climate engineering: Water metering (hot or cold) for air conditioning

Chemical products, even aggressive liquids: Process control, system management

Food/farming products
Crude oil: Management of samplers for controlling loading/unloading

Refined oil products or liquefied gas (LPG): Regulation and control of transport system

Energy: calculation of the yield from hydroelectric power stations

* PLEASE ENQUIRE

Ultraflux



EXPERT IN FLOW METERS
SINCE 1974

MODEL	SINGLE PIPE	MULTI-PIPE
NATURE OF EQUIPMENT	Fixed	
INTERNAL DIAMETER OF PIPE	From 8mm to 9,900mm approximately (depending on wall thickness)	
EXTERNAL DIAMETER OF PIPE	From 10mm to 10,000mm	
INPUT/OUTPUT	<ul style="list-style-type: none"> > With Field bus option: Up to 5 programmable input/output modules > Without Field bus option: Up to 10 programmable input/output modules 	
2 MANDATORY BASE MODULES	<ul style="list-style-type: none"> > 1 isolated active analogue output: current 4-20mA, 0-20mA, 0-24mA > 2 static relay digital outputs (50V - 10mA) usable on frequency outputs 	
IN OPTION, OTHER MODULES AVAILABLE	<ul style="list-style-type: none"> > 1 isolated active analogue output: current 4-20mA, 0-20mA, 0-24mA · Module 1 > 2 static relay outputs usable as frequency outputs (up to 1kHz) · Module 2 > 2 isolated current inputs 4-20mA, 0-20mA, 0-24mA · Module 3 > 2 0-10V voltage inputs · Module 4 > 2 temperature inputs PT100/PT1000 · Module 5 > 2 contact inputs (pulse or state) · Module 6 	
IN OPTION, CALORIMETRIC FUNCTION	<ul style="list-style-type: none"> > 2 temperature inputs PT100/PT1000 · Module 5 + 2 probes PT100 + 2 2.5m cables 	
USE	Flow measurement in a pipe with the ability to incorporate up to eight speed chords (optimised accuracy for difficult hydraulic conditions)	Flow measurement on 1 to 8 pipes with the ability to incorporate up to eight speed chords (depending on the chosen configuration)
OPTION, COMMUNICATION PROTOCOL - FIELD BUS -	Choice of 2 buses: <ul style="list-style-type: none"> > Modbus TCP > Modbus RTU Note: physically takes the place of 5 input/output modules	
DISPLAY	<ul style="list-style-type: none"> > Numeric and graphical (14 lines x 20 characters) > Backlit LCD screen with time delay feature 	
TROUBLESHOOTING HELP	Oscilloscope function (echo displayed) · Gain · Quality index	
SET-UP	<ul style="list-style-type: none"> > Quick and simple - by 7-key touchpad with 2 dynamically allocated - or - via dedicated software supplied > Possible to build in an access code 	
INFORMATION STORAGE	<ul style="list-style-type: none"> > 8MB data logger: time stamping - 1 to 30 variables - up to 536,886 data items > 3-variable time-stamping: 268,443 lines · 14 variables: 71,584 lines · 30 variables: 34,637 lines > Logging frequency from 1 second to 24 hours 	
OPERATING SYSTEM	Windows for transfer of content and operation of logger using common software (Excel, etc.)	
7 LANGUAGES	French · English · German · Portuguese · Spanish · Italian · Russian	
SERIAL LINK	RS232 or RS485 to JBUS/MODBUS protocol · 115,200 Bauds	
CHOICE OF POWER SUPPLY	Low voltage: 9-36V dc · Mains: 110 to 240V ac	
ENCLOSURE	Stainless steel 304, epoxy paint · Plug-in connectors · 8kg · 300 x 346.5 x 148mm	
PROTECTION	IP67 (except with field bus option: IP20)	
TEMPERATURE RANGE	For use from -10°C to 50°C	

TECHNOLOGY	PERFORMANCES			
ULTRASONIC TRANSIT TIME > Continuous bidirectional measurement SIGNAL ANALYSIS > By double Digital Signal Process (real-time Echo Shape Control, digital filtering and regulation of gain on each firing)	ACCURACY > Up to 0.5%	TEMPORAL RESOLUTION > 0.1ns	VOLUME METERING > From a millilitre up to 1,000 cubic metres	ANOTHER IMPORTANT DETAIL > Laminar and turbulent transitions considered (calculation of the Reynolds number) - except for parallel chords > Freedom to mount probes: modes /, V, N and W
	REPEATABILITY > Up to 0.1%	TIME BETWEEN EACH FLOW CALCULATION > 100ms	MEMORY CAPACITY > Up to 11 configurations	
	LINEARITY > Up to 0.1%	UNITS OF MEASUREMENT > From litres per second to cubic metres per day		

